



AQUAKNIGHT DECK DRAIN

PURPOSE

Aquaknight Industries supplies Aquaknight Deck Drains for use as outlets and/or overflow drains in conjunction with a variety of multi-layer and torch-on waterproofing membranes.


EXPLANATION

Aquaknight Deck Drain is hi-flow, uPVC outlet with a stainless steel flat lid and a stainless steel interlocking clamp ring. The fittings have a clamping force of more than 7 tons.

Installation dimensions for the Aquaknight Deck Drain:

- > 232 x 4mm rebate
- > 187mm hole saw floor

Aquaknight Deck Drains are available in the following sizes:

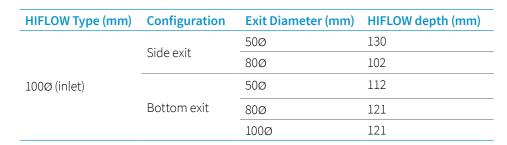



For further assistance please contact:



09 832 2214



admin@aquaknight.co.nz



www.aquaknight.co.nz

SCOPE AND LIMITATIONS OF USE

Scope	Limitations
Location	
In all corrosion zones as defined in NZS 3604:2011.	For micro-climates, as defined in NZS 3604: 2011, contact Aquaknight for material selection information.
Building	
In conjunction with a primary structure that complies with the NZ Building Code or where the designer has established that the existing structure is suitable for the intended building work.	
In conjunction with a single or multi-layer, waterproof membrane up to 8mm in thickness.	Subject to sufficient fall and outlets.



USEFUL INFORMATION

For information on the design, installation and maintenance of Aquaknight Deck Drains, and for our warranty, refer to www.aquaknight.co.nz.

OTHER CERTIFICATIONS HELD BY AQUAKNIGHT

> WaterMark License Number 021417

VERSION:



PERFORMANCE CLAIMS

If designed, installed and maintained in accordance with the all Aquaknight Industries' requirements, the Aquaknight Deck Drain will meet the following performance claims:


N.Z. Building Code clauses	BASIS OF COMPLIANCE	
	Compliance statement ¹	Demonstrated by
B1 Structure B1.3.1, B1.3.2, B1.3.3 (a, b, c, j) ALTERNATIVE SOLUTION	Product meets requirements of AS/NZS 1260, including test methods referenced in that standard.	
	> Product meets the requirements of AS/NZS1254:2010 tested for stiffness classes SN2, SN4 & SN8.	
B2 Durability B2.3.1 (b)	ALTERNATIVE SOLUTION	> Product meets requirements of AS/NZS 1260, including test methods referenced in that standard.
(-)		> Historic material performance.
E1 Surface Water	ACCEPTABLE SOLUTION	> uPVC in accordance with AS/NZS 1260 complies with E1/AS1.
E1.3.3 (a, b, c, d, e, f)	E1/AS1 Table 1	
F2 Hazardous Materials F2.3.1	ALTERNATIVE SOLUTION	Product meets requirements of AS/NZS 1260, including test methods referenced in that standard, including manufacture of PVC resin.

^{1.} The Compliance Statement is the pass holder's statement that they have met their obligations under s14G(2) of the Building Act 2004.

Other performance	BASIS OF STATEMENT
statement	Demonstrated by
Aquaknight will not	> Stainless steel is not porous and therefore not conducive to mold development.
contaminate potable water	> uPVC does not support the growth of mold.

SOURCES OF INFORMATION

- WaterMark License Number 021417 Retrieved from https://www.abcb.gov.au/Product-Certification/WaterMark-Certification-Scheme/WMPD-Search
- > AS/NZS 1260:2017 PVC-U pipes and fittings for drain, waste and vent applications
- > Waterproofing Membrane Association Inc, Code of Practice
- > NZS3604:2011 Timber Framed Buildings

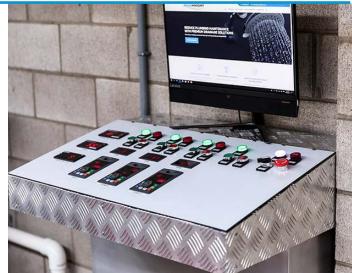

VERSION: DATE:

Note: Uncontrolled in printed format.

NAME: Rodney Knight

POSITION: Managing Director

Signed on behalf of Aquaknight:

By signing this pass™ the signatory confirms that, in respect of the subject of this pass™, the company has met their s14G obligations under the Building Act 2004.



Aquaknight, 33 Leslie Avenue, Sandringham, Auckland 1025 > admin@aquaknight.co.nz > 09 832 2214 > www.aquaknight.co.nz