

AQUAKNIGHT INTERBALCONY DRAINS

PURPOSE

Aquaknight Industries supplies Aquaknight Interbalcony Drains for use as outlets in conjunction with sheet, torch on, or liquid applied waterproofing membranes in domestic and commercial applications. Most commonly used for common-downpipe drainage of multiple balconies and installed under floating tiles. Available in either draining or sealed versions.

EXPLANATION

The Aquaknight Interbalcony Drain is a hi-flow, uPVC outlet with a stainless-steel clamping ring and plastic downpipe connection. The fittings have a clamping force suitable to seal all modern membrane installations.

Aquaknight Interbalcony Drains are available with bottom or side exits, vented and non-vented and with inlets of between 65 and 150 mm and outlets of between 65 mm and 150 mm.




For further assistance please contact:

-  09 832 2214
-  admin@aquaknight.co.nz
-  aquaknight.co.nz

SCOPE AND LIMITATIONS OF USE

Scope	Limitations
Location In all exposure zones as defined in NZS 3604:2011.	> For micro-climates as defined in NZS 3604: 2011, contact Aquaknight for material selection information.
Building In conjunction with a primary structure that complies with the NZ Building Code or where the designer has established that the existing structure is suitable for the intended building work. In conjunction with a single or multi-layer, waterproof membrane up to 8mm in thickness.	> Subject to sufficient fall and outlets. > Flow rates to be calculated in accordance with E1/AS1 or E1/VM1. > Aquaknight Interbalcony Drains must meet or exceed the flow rate requirements of the downpipes they are connected to.

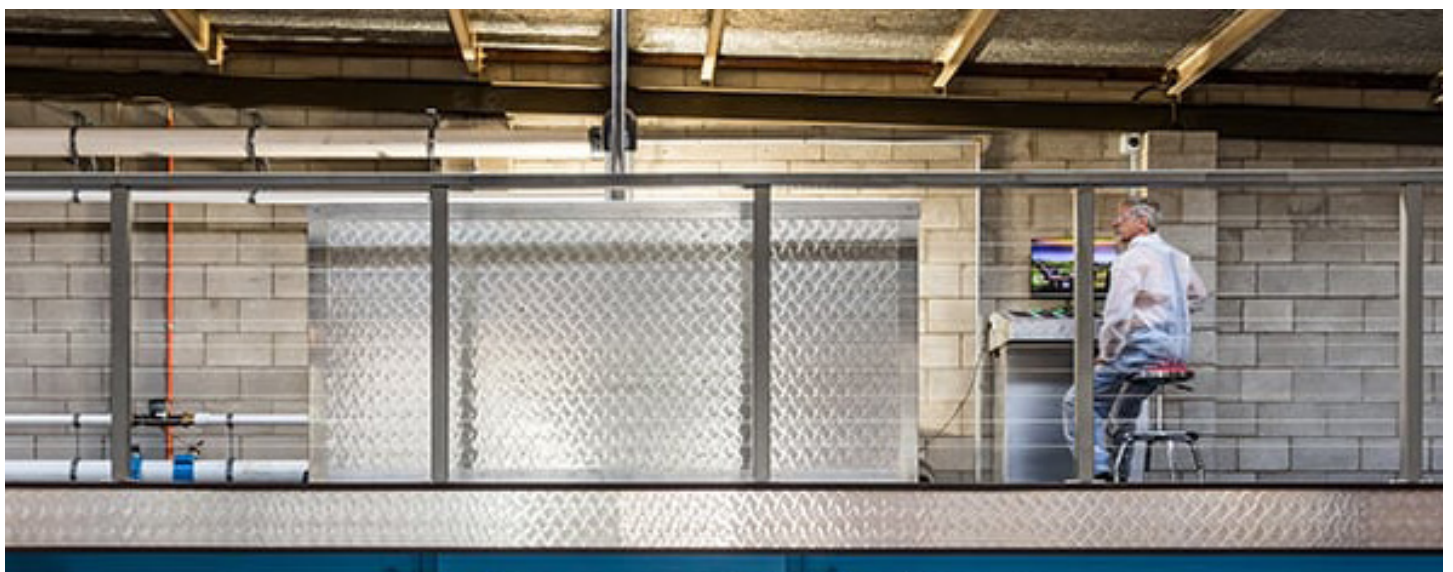

USEFUL INFORMATION

For design, installation and maintenance information, refer to aquaknight.co.nz.

OTHER CERTIFICATIONS HELD BY AQUAKNIGHT

- > ISO 9001 certification [SGS, 05/02/2020].

PERFORMANCE CLAIMS

If designed, installed and maintained in accordance with all Aquaknight Industries' requirements, Aquaknight Interbalcony Drain will comply with or contribute to compliance with the following performance claims:

N.Z. Building Code clauses	BASIS OF COMPLIANCE	
	Compliance statement	Demonstrated by
B1 Structure B1.3.1, B1.3.2, B1.3.3 (a, b, c, j)	ALTERNATIVE SOLUTION	<ul style="list-style-type: none"> Manufactured in accordance with AS/NZS 3500 and AS/NZS 1260 [Aquaknight, 2017; Chemvin Plastics Limited, 22/11/2013].
B2 Durability B2.3.1 (b)	ALTERNATIVE SOLUTION	<ul style="list-style-type: none"> Manufactured in accordance with AS/NZS 3500 and AS/NZS 1260 [Aquaknight, 2017; Chemvin Plastics Limited, 22/11/2013]. Historic material performance.
E1 Surface Water E1.3.3	ACCEPTABLE SOLUTION E1/AS1 and VERIFICATION METHOD E1/VM1	<ul style="list-style-type: none"> Manufactured in accordance with AS/NZS 3500 and AS/NZS 1260 [Aquaknight, 2017; Chemvin Plastics Limited, 22/11/2013]. Flow rates calculated in accordance with E1/AS1 or E1/VM1.
F2 Hazardous Materials F2.3.1	ALTERNATIVE SOLUTION	<ul style="list-style-type: none"> Manufactured in accordance with AS/NZS 3500 and AS/NZS 1260 [Aquaknight, 2017; Chemvin Plastics Limited, 22/11/2013].

Other performance statement	BASIS OF STATEMENT
	Demonstrated by
Aquaknight Interbalcony Drains will not contaminate potable water	<ul style="list-style-type: none"> Stainless steel is not porous and therefore not conducive to mould development. uPVC does not support the growth of mould.

SOURCES OF INFORMATION

- Aquaknight. [2017] *Interbalcony Membrane Drainage*. <https://www.aquaknight.co.nz/down-pipe-junction-inter-balcony/>
- Chemvin Plastics Ltd. [22/11/2013] *Technical Data Sheet*.
- SGS. [05/02/2020]. *ISO 9001*. Certificate NZ20/873752.

SCAN OR CLICK THIS QR CODE TO ACCESS OR REQUEST THE RELEVANT SUPPORTING DOCUMENTATION FOR THIS PASS™.

aquaknight.co.nz/downloads/membrane-drain/



1. Where a standard is referenced it is to be read as amended by the acceptable solution or verification method as applicable. 2. Sources of information also include the Building Act 2004 and its regulations, including the Building Code (Schedule 1 of the Building Regulations 1992), Acceptable Solutions and Verification Methods, and relevant cited standards. 3. The product is not subject to a warning or ban under section 26 of the Building Act. 4. For overseas manufacturer details, where applicable, refer to the company that is the holder of this pass™. 5. The quality and assurance that the supplied products meet the performance claims stated in this pass™ are the responsibility of the company that is the holder of this pass™. 6. The availability of the information about the supplied products required to be disclosed under s14G(3) is the responsibility of the company that is the holder of this pass™.

Aquaknight Industries Ltd confirms that if Aquaknight Interbalcony Drains are used in accordance with the requirements of this pass™ the product will comply with the NZ Building Code and other performance claims set out in this pass™ and the company has met all of its obligations under s14G(2) of the Building Act.

Date of first issue: 30/07/2019

Date of current issue: 24/01/2024

NZBN: 9429000113274

Kevin Brunton

Kevin Brunton, Technical Director, TBB confirms that the process used to prepare this pass™ on behalf of Aquaknight Industries Ltd has been undertaken in accordance with MBIE PTS guidelines and in accordance with the TBB pass™ process which is within the scope of TBB's ISO 9001 certification.

9606D66ADE51EA6CCC25850D00239F99



Aquaknight, 33 Leslie Avenue, Sandringham, Auckland 1025 > admin@aquaknight.co.nz > 09 832 2214 > aquaknight.co.nz

Copyright © 2017, The Building Business Limited (TBB). All rights reserved.